



DXK-40 Rotary Charging Port 旋卡座

公称压力:4.0MPa

公称通径:40 mm

适用介质:O₂、N₂、Ar等气体或液体

适用温度:-196℃~+80℃

连接形式:法兰

法兰安装尺寸:4-Ø14螺栓孔, 中心距Ø100

Nominal Pressure: 4.0MPa



Nominal Diameter: 40 mm

Suitable Medium: O₂、N₂、Ar etc.

Suitable Temp.: -196℃~+80℃

Connection Type: Flange

Flange Installation Size: 4-Ø14bolthole circleØ100

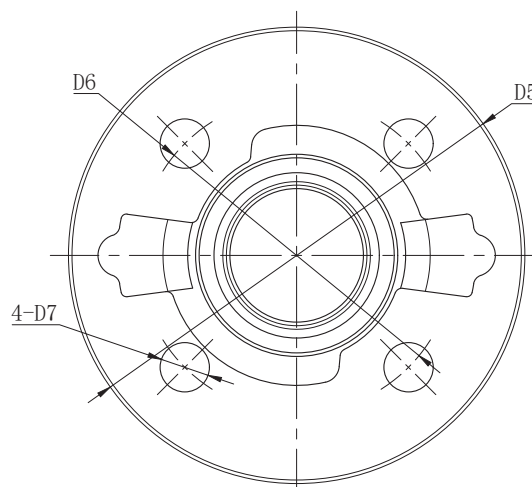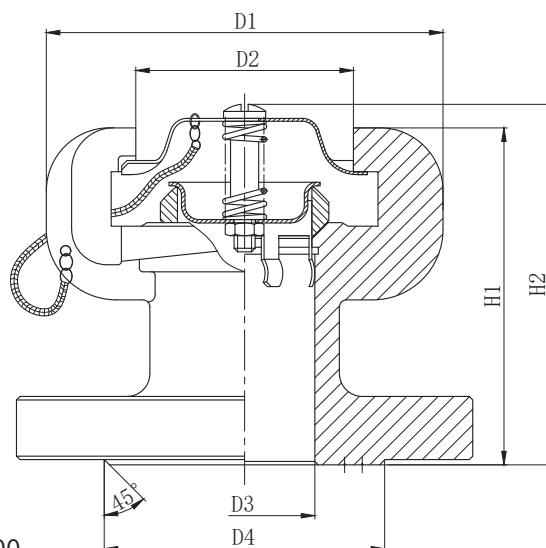

主要零件材料:

阀体:不锈钢

密封件材质:T2

Materials of Main Parts

Body:Stainless Steel

Sealing Material: T2

型号 TYPE	主要外形和连接尺寸 (mm) Major Overall & Connection Dimensions								
	D1	D2	D3	D4	D5	D6	D7	H1	H2
DXK-40A	113	Ø 62	Ø 40	Ø 80	Ø 130	Ø 100	4-Ø 14	97	104